



1-总装图A0

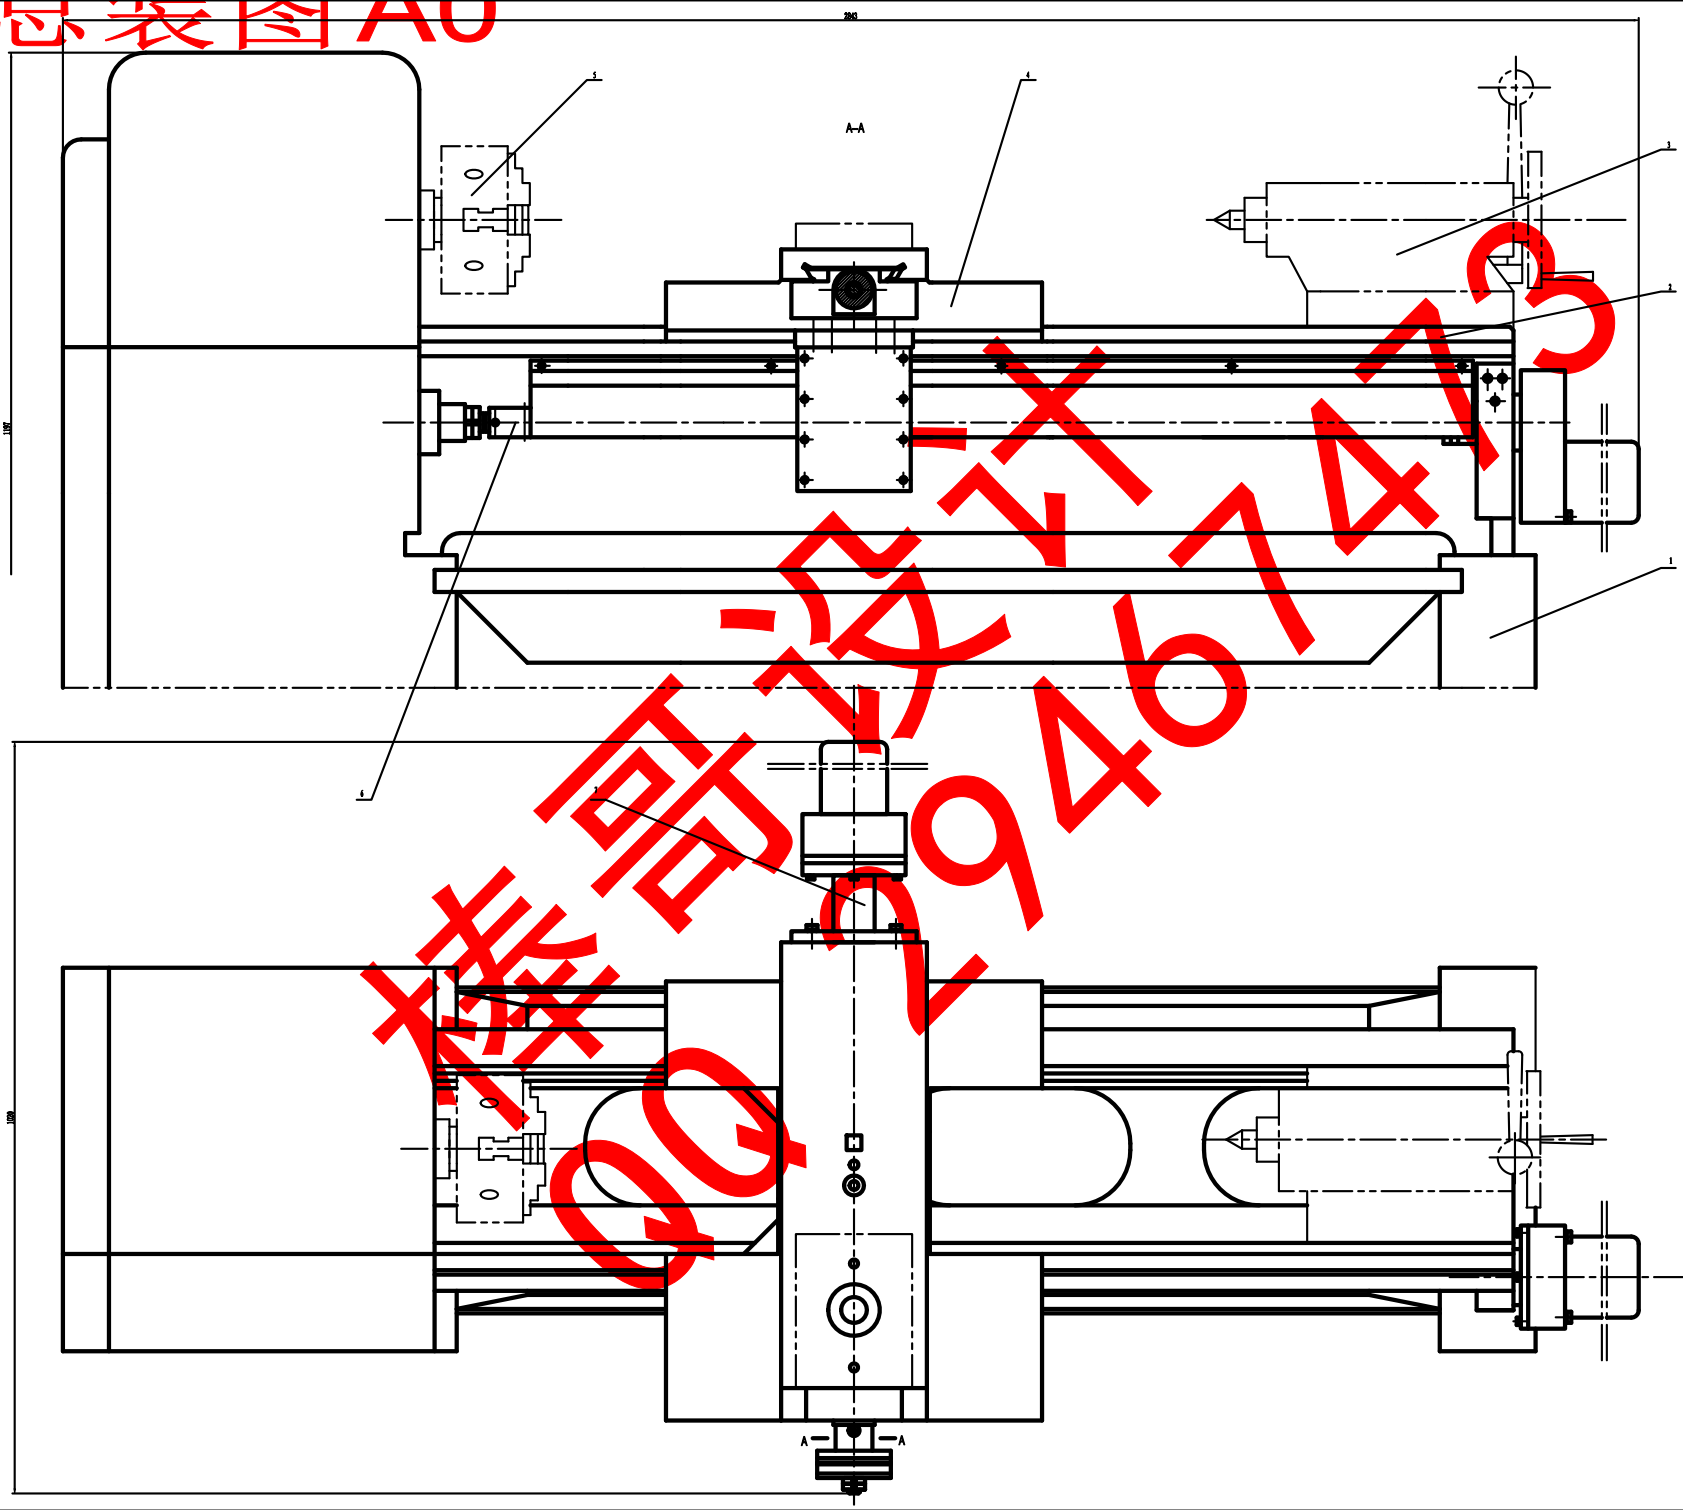

技术要求
1. 底座固定中心轴与中心轴垂直度。
2. 零件表面粗糙度符合图样。
3. 装配时各零件应无松动、无干涉。





1	底座	HT150	1	1	1	零件图例1-1
2	底座	HT150	1	1	1	零件图例1-1
3	轴	HT150	1	1	1	
4	轴	HT150	1	1	1	
5	轴	HT150	1	1	1	
6	轴	HT150	1	1	1	
7	轴	HT150	1	1	1	
8	轴	HT150	1	1	1	
9	轴	HT150	1	1	1	
10	轴	HT150	1	1	1	
11	轴	HT150	1	1	1	
12	轴	HT150	1	1	1	
13	轴	HT150	1	1	1	
14	轴	HT150	1	1	1	
15	轴	HT150	1	1	1	
16	轴	HT150	1	1	1	
17	轴	HT150	1	1	1	
18	轴	HT150	1	1	1	
19	轴	HT150	1	1	1	
20	轴	HT150	1	1	1	
21	轴	HT150	1	1	1	
22	轴	HT150	1	1	1	
23	轴	HT150	1	1	1	
24	轴	HT150	1	1	1	
25	轴	HT150	1	1	1	
26	轴	HT150	1	1	1	
27	轴	HT150	1	1	1	
28	轴	HT150	1	1	1	
29	轴	HT150	1	1	1	
30	轴	HT150	1	1	1	
31	轴	HT150	1	1	1	
32	轴	HT150	1	1	1	
33	轴	HT150	1	1	1	
34	轴	HT150	1	1	1	
35	轴	HT150	1	1	1	
36	轴	HT150	1	1	1	
37	轴	HT150	1	1	1	
38	轴	HT150	1	1	1	
39	轴	HT150	1	1	1	
40	轴	HT150	1	1	1	
41	轴	HT150	1	1	1	
42	轴	HT150	1	1	1	
43	轴	HT150	1	1	1	
44	轴	HT150	1	1	1	
45	轴	HT150	1	1	1	
46	轴	HT150	1	1	1	
47	轴	HT150	1	1	1	
48	轴	HT150	1	1	1	
49	轴	HT150	1	1	1	
50	轴	HT150	1	1	1	
51	轴	HT150	1	1	1	
52	轴	HT150	1	1	1	
53	轴	HT150	1	1	1	
54	轴	HT150	1	1	1	
55	轴	HT150	1	1	1	
56	轴	HT150	1	1	1	
57	轴	HT150	1	1	1	
58	轴	HT150	1	1	1	
59	轴	HT150	1	1	1	
60	轴	HT150	1	1	1	
61	轴	HT150	1	1	1	
62	轴	HT150	1	1	1	
63	轴	HT150	1	1	1	
64	轴	HT150	1	1	1	
65	轴	HT150	1	1	1	
66	轴	HT150	1	1	1	
67	轴	HT150	1	1	1	
68	轴	HT150	1	1	1	
69	轴	HT150	1	1	1	
70	轴	HT150	1	1	1	
71	轴	HT150	1	1	1	
72	轴	HT150	1	1	1	
73	轴	HT150	1	1	1	
74	轴	HT150	1	1	1	
75	轴	HT150	1	1	1	
76	轴	HT150	1	1	1	
77	轴	HT150	1	1	1	
78	轴	HT150	1	1	1	
79	轴	HT150	1	1	1	
80	轴	HT150	1	1	1	
81	轴	HT150	1	1	1	
82	轴	HT150	1	1	1	
83	轴	HT150	1	1	1	
84	轴	HT150	1	1	1	
85	轴	HT150	1	1	1	
86	轴	HT150	1	1	1	
87	轴	HT150	1	1	1	
88	轴	HT150	1	1	1	
89	轴	HT150	1	1	1	
90	轴	HT150	1	1	1	
91	轴	HT150	1	1	1	
92	轴	HT150	1	1	1	
93	轴	HT150	1	1	1	
94	轴	HT150	1	1	1	
95	轴	HT150	1	1	1	
96	轴	HT150	1	1	1	
97	轴	HT150	1	1	1	
98	轴	HT150	1	1	1	
99	轴	HT150	1	1	1	
100	轴	HT150	1	1	1	
101	轴	HT150	1	1	1	
102	轴	HT150	1	1	1	
103	轴	HT150	1	1	1	
104	轴	HT150	1	1	1	
105	轴	HT150	1	1	1	
106	轴	HT150	1	1	1	
107	轴	HT150	1	1	1	
108	轴	HT150	1	1	1	
109	轴	HT150	1	1	1	
110	轴	HT150	1	1	1	
111	轴	HT150	1	1	1	
112	轴	HT150	1	1	1	
113	轴	HT150	1	1	1	
114	轴	HT150	1	1	1	
115	轴	HT150	1	1	1	
116	轴	HT150	1	1	1	
117	轴	HT150	1	1	1	
118	轴	HT150	1	1	1	
119	轴	HT150	1	1	1	
120	轴	HT150	1	1	1	
121	轴	HT150	1	1	1	
122	轴	HT150	1	1	1	
123	轴	HT150	1	1	1	
124	轴	HT150	1	1	1	
125	轴	HT150	1	1	1	
126	轴	HT150	1	1	1	
127	轴	HT150	1	1	1	
128	轴	HT150	1	1	1	
129	轴	HT150	1	1	1	
130	轴	HT150	1	1	1	
131	轴	HT150	1	1	1	
132	轴	HT150	1	1	1	
133	轴	HT150	1	1	1	
134	轴	HT150	1	1	1	
135	轴	HT150	1	1	1	
136	轴	HT150	1	1	1	
137	轴	HT150	1	1	1	
138	轴	HT150	1	1	1	
139	轴	HT150	1	1	1	
140	轴	HT150	1	1	1	
141	轴	HT150	1	1	1	
142	轴	HT150	1	1	1	
143	轴	HT150	1	1	1	
144	轴	HT150	1	1	1	
145	轴	HT150	1	1	1	
146	轴	HT150	1	1	1	
147	轴	HT150	1	1	1	
148	轴	HT150	1	1	1	
149	轴	HT150	1	1	1	
150	轴	HT150	1	1	1	
151	轴	HT150	1	1	1	
152	轴	HT150	1	1	1	
153	轴	HT150	1	1	1	
154	轴	HT150	1	1	1	
155	轴	HT150	1	1	1	
156	轴	HT150	1	1	1	
157	轴	HT150	1	1	1	
158	轴	HT150	1	1	1	
159	轴	HT150	1	1	1	
160	轴	HT150	1	1	1	
161	轴	HT150	1	1	1	
162	轴	HT150	1	1	1	
163	轴	HT150	1	1	1	
164	轴	HT150	1	1	1	
165	轴	HT150	1	1	1	
166	轴	HT150	1	1	1	
167	轴	HT150	1	1	1	
168	轴	HT150	1	1	1	
169	轴	HT150	1	1	1	
170	轴	HT150	1	1	1	
171	轴	HT150	1	1	1	
172	轴	HT150	1	1	1	
173	轴	HT150	1	1	1	
174	轴	HT150	1	1	1	
175	轴	HT150	1	1	1	
176	轴	HT150	1	1	1	
177	轴	HT150	1	1	1	
178	轴	HT150	1	1	1	
179	轴	HT150	1	1	1	
180	轴	HT150	1	1	1	
181	轴	HT150	1	1	1	
182	轴	HT150	1	1	1	
183	轴	HT150	1	1	1	
184	轴	HT150	1	1	1	
185	轴	HT150	1	1	1	
186	轴	HT150	1	1	1	
187	轴	HT150	1	1	1	
188	轴	HT150	1	1	1	
189	轴	HT150	1	1	1	
190	轴	HT150	1	1	1	
191	轴	HT150	1	1	1	
192	轴	HT150	1	1	1	
193	轴	HT150	1	1	1	
194	轴	HT150	1	1	1	
195	轴	HT150	1	1	1	
196	轴	HT150	1	1	1	
197	轴	HT150	1	1	1	
198	轴	HT150	1	1	1	
199	轴	HT150	1	1	1	
200	轴	HT150	1	1	1	
201	轴	HT150	1	1	1	
202	轴	HT150	1	1	1	
203	轴	HT150	1	1	1	
204	轴	HT150	1	1	1	
205	轴	HT150	1	1	1	
206	轴	HT150	1	1	1	
207	轴	HT150	1	1	1	
208	轴	HT150	1	1	1	
209	轴	HT150	1	1	1	
210	轴	HT150	1	1	1	
211	轴	HT150	1	1	1	
212	轴	HT150	1	1	1	
213	轴	HT150	1	1	1	
214	轴	HT150	1	1	1	
215	轴	HT150	1	1	1	
216	轴	HT150	1	1	1	
217	轴	HT150	1	1	1	
218	轴	HT150	1	1	1	
219	轴	HT150	1	1	1	
220	轴	HT150	1	1	1	
221	轴	HT150	1	1	1	
222	轴	HT150	1	1	1	
223	轴	HT150	1	1	1	
224	轴	HT150	1	1	1	
225	轴	HT150	1	1	1	
226	轴	HT150	1	1	1	
227	轴	HT150	1	1	1	
228	轴	HT150	1	1	1	
229	轴	HT150	1	1	1	
230	轴	HT150	1	1	1	
231	轴	HT150	1	1	1	
232	轴	HT150	1	1	1	
233	轴	HT150	1	1	1	
234	轴	HT150	1	1	1	
235	轴	HT150	1	1	1	
236	轴	HT150	1	1	1	
237	轴	HT150	1	1	1	
238	轴	HT150	1	1	1	
239	轴	HT150	1	1	1	
240	轴	HT150	1	1	1	
241	轴	HT150	1	1	1	
242	轴	HT150	1	1	1	
243	轴	HT150	1	1	1	
244	轴	HT150	1	1	1	
245	轴	HT150	1	1	1	
246	轴	HT150	1	1	1	
247	轴	HT150	1	1	1	
248	轴	HT150	1	1	1	
249	轴	HT150	1	1	1	
250	轴	HT150	1	1	1	
251	轴	HT150	1	1	1	
252	轴	HT150	1	1	1	
253	轴	HT150	1	1	1	
254	轴	HT150	1	1	1	
255	轴	HT150	1			

2-电控图 A0

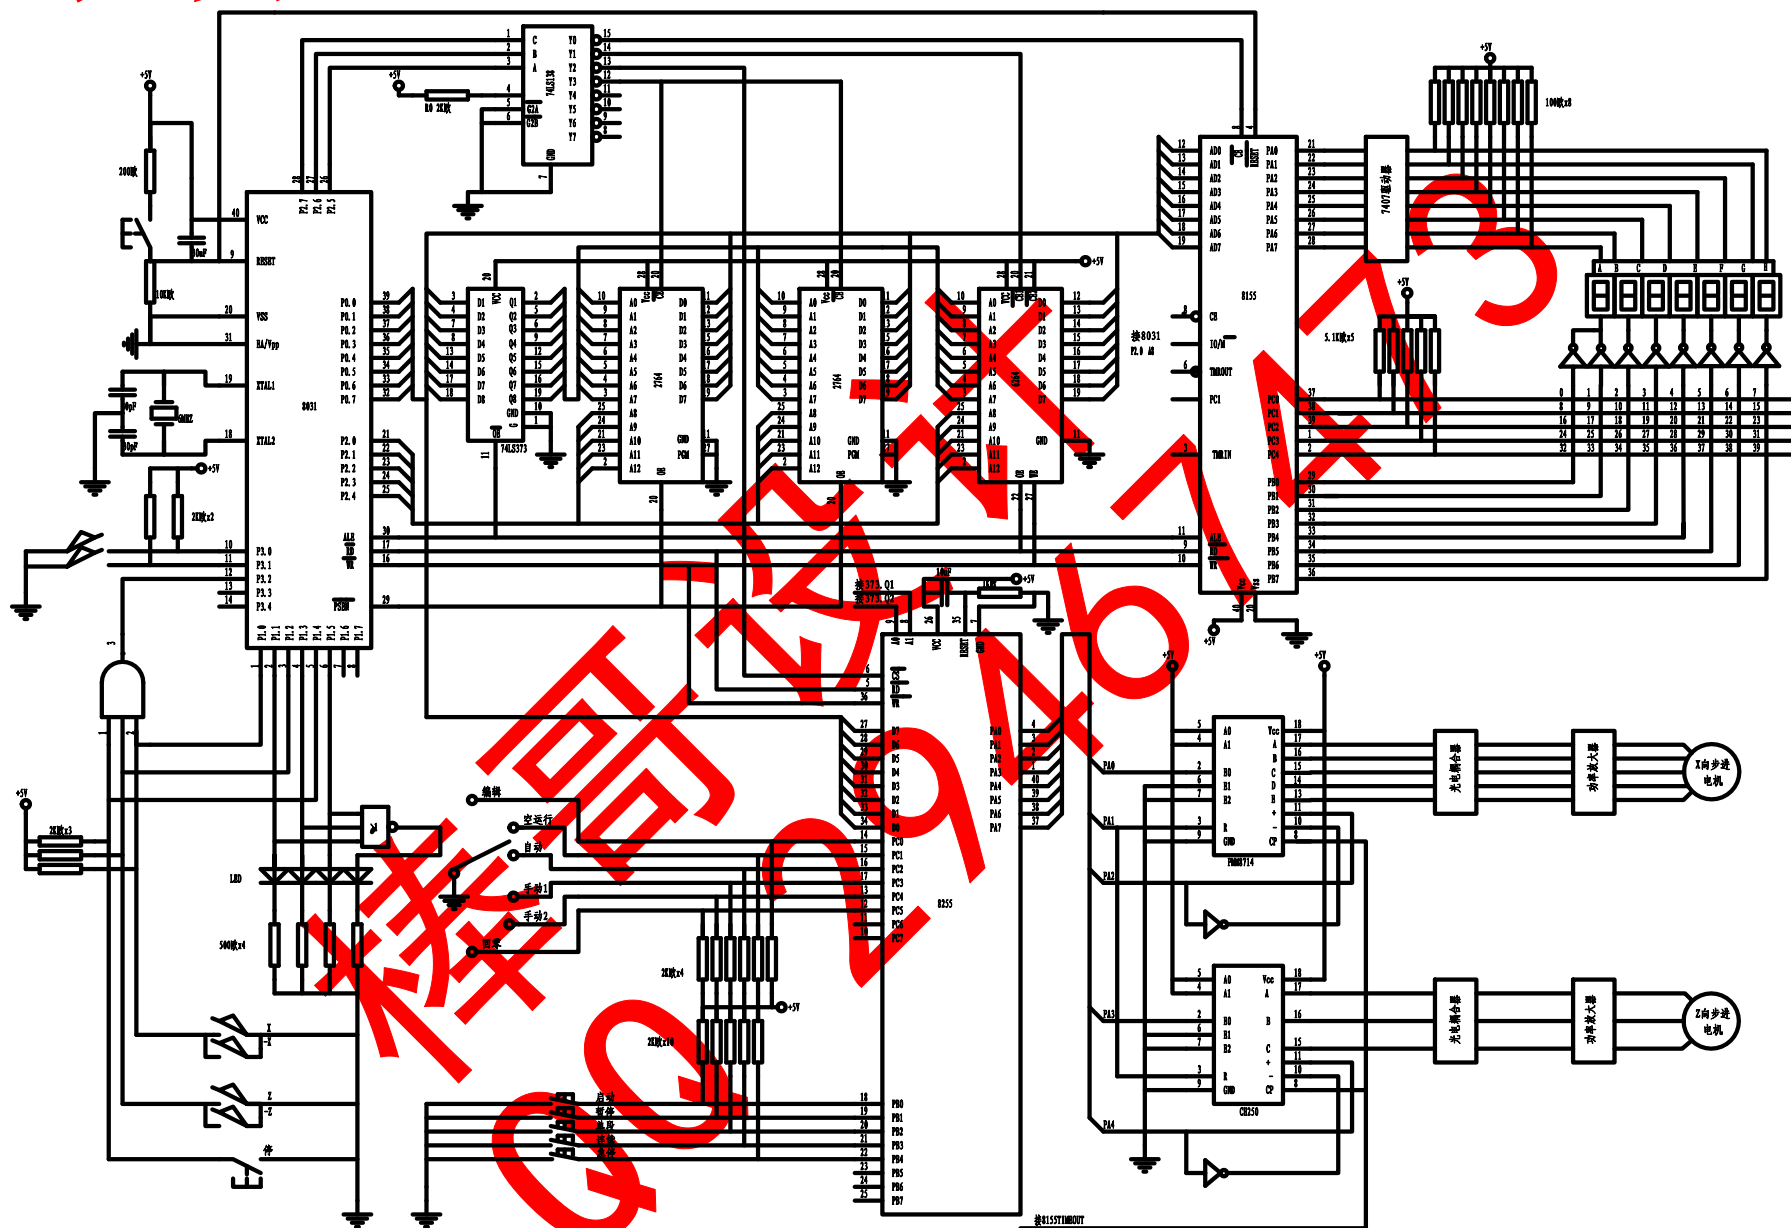

										山东大学	
设计人: 李强		审核人: 王明		日期: 2023.10.27		图号: QK-001		张数: 1/1		电气控制图	
设计人: 李强		审核人: 王明		日期: 2023.10.27		图号: QK-001		张数: 1/1			
设计人: 李强		审核人: 王明		日期: 2023.10.27		图号: QK-001		张数: 1/1			
学号						共 4 页		第 2 页		AO	
工学				机电							

3-横向结构A1

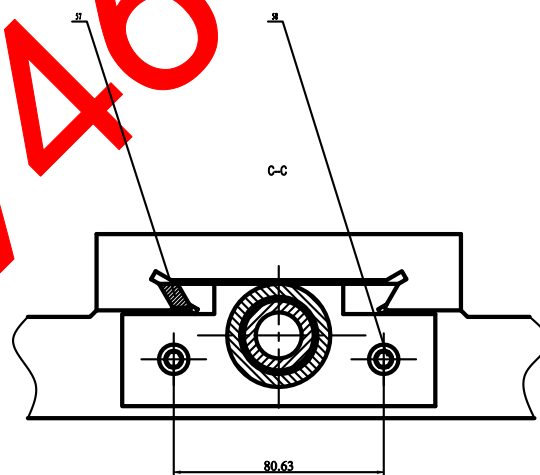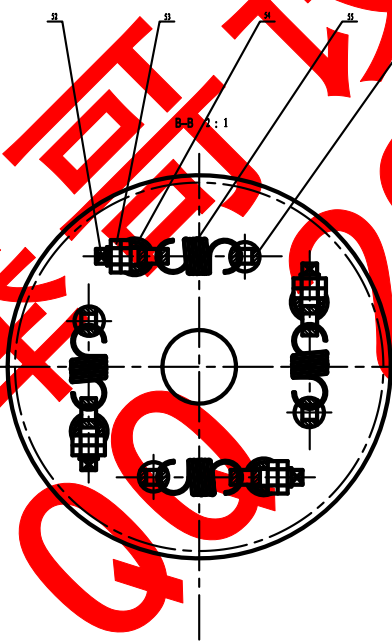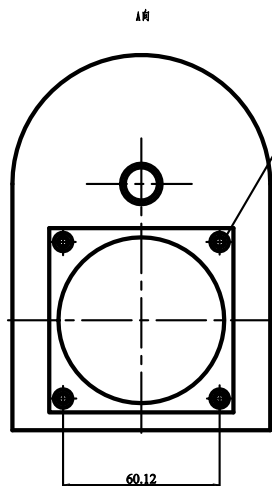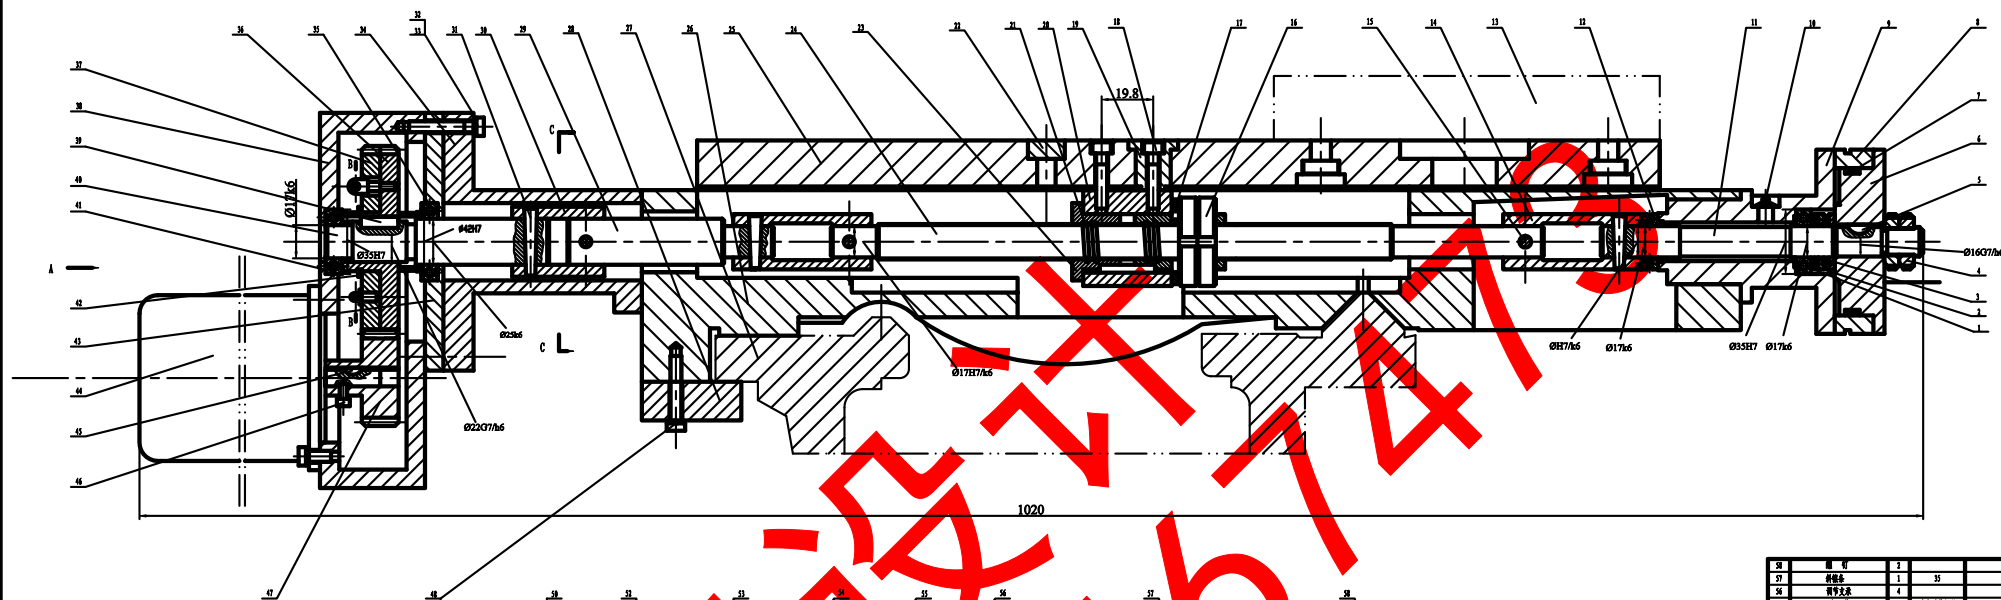

技术要求

1. 按照所给参数进行装配，装配后中心轴与壳体中心线重合。
2. 按照所给参数进行装配，装配后中心轴与壳体中心线重合。
3. 按照所给参数进行装配，装配后中心轴与壳体中心线重合。
4. 按照所给参数进行装配，装配后中心轴与壳体中心线重合。
5. 按照所给参数进行装配，装配后中心轴与壳体中心线重合。
6. 按照所给参数进行装配，装配后中心轴与壳体中心线重合。



37	轴套	1		GB 70-1985
36	轴套	1	35	
35	轴套	4		
34	轴套	4		
33	轴套	4		
32	轴套	4		
31	轴套	4	GB 70-1985	
30	轴套	4		
29	轴套	5	GB 70-1985	
28	轴套	5		
27	轴套	1	GB 70-1985	
26	轴套	1		
25	轴套	1	GB 70-1985	
24	轴套	1		
23	轴套	1	GB 70-1985	
22	轴套	1		
21	轴套	1	GB 70-1985	
20	轴套	1		
19	轴套	1	GB 70-1985	
18	轴套	1		
17	轴套	1	GB 70-1985	
16	轴套	1		
15	轴套	1	GB 70-1985	
14	轴套	1		
13	轴套	1	GB 70-1985	
12	轴套	1		
11	轴套	1	GB 70-1985	
10	轴套	1		
9	轴套	1	GB 70-1985	
8	轴套	1		
7	轴套	1	GB 70-1985	
6	轴套	1		
5	轴套	1	GB 70-1985	
4	轴套	1		
3	轴套	1	GB 70-1985	
2	轴套	1		
1	轴套	1	GB 70-1985	

山东大学
机械工程学院
机械制图
教师: 王立军
学生: 王立军
日期: 2023.11.11
图号: 0208-09-02

This technical drawing illustrates a mechanical assembly in cross-section. The central component is a shaft (14) that passes through several housing sections. Key components include:

- Gears:** A large gear (15) is mounted on the shaft, meshing with a smaller gear (16). Another gear (17) is visible on the right side.
- Bearings:** The shaft is supported by bearings (18, 19, 20, 21, 22, 23, 24, 25, 26) housed within the main body.
- Seals and O-rings:** Various seals (e.g., 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26) are used to prevent leakage.
- Internal Components:** The drawing shows internal features like a central cavity (14) and various internal parts (e.g., 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26).

 The drawing is numbered 1 through 48, indicating different parts. A large red watermark '46' is overlaid on the drawing.

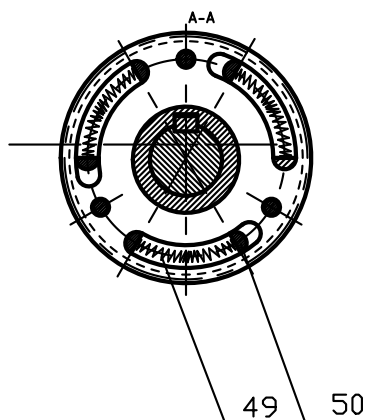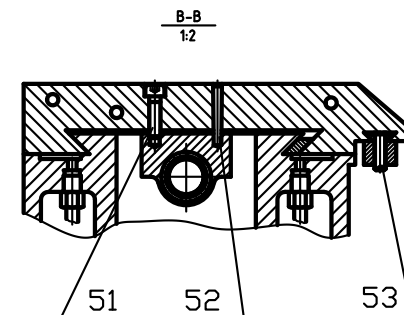

- 1.用螺母的间隔调整装置调整丝杠副间隙时,应使调整后产生的预紧力为丝杠副最大负载的1/3为宜;
- 2.装配滚动轴承时,可采用油加热进行预热,油的温度不得超过100℃;
- 3.零件在装配前必须清理和清洗干净,不得有毛刺、飞边、氧化皮、锈蚀、切屑、油污、着色剂和灰尘等;
- 4.齿轮和丝杠采用油润滑。

[illegible]