

# Pipe threads where pressure-tight joints are not made on the threads —

## Part 1: Dimensions, tolerances and designation

The European Standard EN ISO 228-1:2003 has the status of a  
British Standard

ICS 21.040.30

## National foreword

This British Standard is the official English language version of EN ISO 228-1:2003. It is identical with ISO 228-1:2000. Together with BS EN ISO 228-2:2003, it supersedes BS 2779:1986 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee ISE/19, Ferrous pipe fittings (excluding cast iron), which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

### Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

### Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii and iii, a blank page, pages 1 to 8, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

### Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 26 February 2003

© BSI 26 February 2003

ISBN 0 580 41320 9

ICS 21.040.30

English version

Pipe threads where pressure-tight joints are not made on the  
threads - Part 1: Dimensions, tolerances and designation (ISO  
228-1:2000)

Filetages de tuyauterie pour raccordement sans étanchéité  
dans le filet - Partie 1: Dimensions, tolérances et  
désignation (ISO 228-1:2000)

Rohrgewinde für nicht im Gewinde dichtende Verbindungen  
- Teil 1: Maße, Toleranzen und Bezeichnung (ISO 228-  
1:2000)

This European Standard was approved by CEN on 15 November 2002.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovak Republic, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

**EN ISO 228-1:2003****Foreword**

The text of ISO 228-1:2000 has been prepared by Technical Committee ISO/TC 5 "Ferrous metal pipes and metallic fittings" of the International Organization for Standardization (ISO) and has been taken over as EN ISO 228-1:2003 by Technical Committee EC/ISS/TC 29 "Steel tubes and fittings for steel tubes", the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2003, and conflicting national standards shall be withdrawn at the latest by August 2003.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and the United Kingdom.

**Endorsement notice**

The text of ISO 228-1:2000 has been approved by CEN as EN ISO 228-1:2003 without any modifications.

# INTERNATIONAL STANDARD

# ISO 228-1

Fourth edition  
2000-09-01

---

---

## **Pipe threads where pressure-tight joints are not made on the threads —**

### **Part 1: Dimensions, tolerances and designation**

*Filetages de tuyauterie pour raccordement sans étanchéité dans le filet —*

*Partie 1: Dimensions, tolérances et désignation*



Reference number  
ISO 228-1:2000(E)

EN ISO 228-1:2003

Licensed Copy: London South Bank University, London South Bank University, Fri Oct 27 04:04:29 GMT+00:00 2006, Uncontrolled Copy, (c) BSI

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 228 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 228-1 was prepared by Technical Committee ISO/TC 5, *Ferrous metal pipes and metallic fittings*, Subcommittee SC 5, *Threaded or plain end butt-welding fittings, threads, gauging of threads*.

This fourth edition cancels and replaces the third edition (ISO 228-1:1994), which has been technically revised.

ISO 228 consists of the following parts, under the general title *Pipe threads where pressure-tight joints are not made on the threads*:

- *Part 1: Dimensions, tolerances and designation*
- *Part 2: Verification by means of limit gauges*

Annex A of this part of ISO 228 is for information only.



# Pipe threads where pressure-tight joints are not made on the threads —

## Part 1: Dimensions, tolerances and designation

### 1 Scope

This part of ISO 228 specifies the requirements for thread form, dimensions, tolerances and designation for fastening pipe threads, thread sizes 1/16 to 6 inclusive. Both internal and external threads are parallel threads, intended for the mechanical assembly of the component parts of fittings, cocks and valves, accessories, etc.

These threads are not suitable as jointing threads where a pressure-tight joint is made on the thread. If assemblies with such threads must be made pressure-tight, this should be effected by compressing two tightening surfaces outside the threads, and by interposing an appropriate seal.

NOTE 1 For pipe threads where pressure-tight joints are made on the threads, see ISO 7-1.

NOTE 2 ISO 228-2 gives details of methods for verification of fastening thread dimensions and form, and recommended gauging systems.

### 2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 228. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 228 are encouraged to investigate the possibility of applying the most recent editions of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 7-1:1994, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation.*

**EN ISO 228-1:2003****3 Symbols**

For the purposes of this part of ISO 228, the following symbols apply.

A Tighter class of tolerance of external pipe threads where pressure-tight joints are not made on the threads

B Wider class of tolerance of external pipe threads where pressure-tight joints are not made on the threads

$D$  =  $d$ ; major diameter of the internal thread

$D_1$  =  $D - 1,280\ 654\ P = d_1$ ; minor diameter of the internal thread

$D_2$  =  $D - 0,640\ 327\ P = d_2$ ; pitch diameter of the internal thread

$d$  Major diameter of the external thread

$d_1$  =  $d - 1,280\ 654\ P$ ; minor diameter of the external thread

$d_2$  =  $d - 0,640\ 327\ P$ ; pitch diameter of the external thread

G Pipe thread where pressure-tight joints are not made on the threads

$H$  Height of the fundamental triangle of the thread

$h$  Height of the thread profile with rounded crests and roots

$P$  Pitch

$r$  Radius of rounded crests and roots

$T_{D1}$  Tolerance on the minor diameter of the internal thread

$T_{D2}$  Tolerance on the pitch diameter of the internal thread

$T_d$  Tolerance on the major diameter of the external thread

$T_{d2}$  Tolerance on the pitch diameter of the external thread

**4 Dimensions**

The profile of these threads is identical with that of the parallel thread specified in ISO 7-1. The internal and external threads covered by this part of ISO 228 are both parallel.

Unless otherwise specified, the thread in accordance with this part of ISO 228 is a right-hand thread. (See also clause 5.)

Threads are normally of the truncated form, with crests truncated to the limits of tolerance as given in columns 14 and 15 of Table 1. The exception to this is on internal threads, where they are likely to be assembled with external threads in accordance with ISO 7-1, and in which case the thread length shall be equal to or greater than that specified in ISO 7-1.

The tolerances on the pitch diameter of the internal threads correspond to the positive deviation of the diameter tolerances in ISO 7-1, with the exception of those for thread sizes 1/16, 1/8, 1/4 and 3/8, for which slightly higher values are specified.

For external threads, two classes of tolerances on the pitch diameter are specified (see Table 1).


- Class A (column 10) consists of entirely negative tolerances, each equivalent in value to the tolerance for the respective internal thread.
- Class B (column 11) consists of entirely negative tolerances, each with a value of twice that of the respective internal thread.

The choice between class A and class B depends on the conditions of application and shall be made in product standards where threads in accordance with this part of ISO 228 are specified.

Pipe thread dimensions, in millimetres, are given in Table 1.

EN ISO 228-1:2003

Figure 1 shows fastening threads with full-form profiles and their tolerance zones.

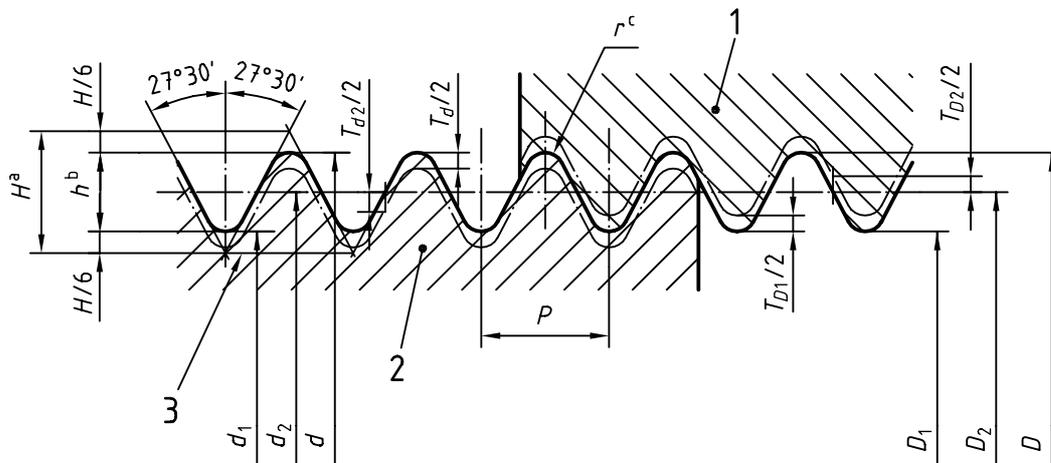


Key

- 1 Internal thread
- 2 External thread
- 3 Fundamental triangle

- a  $H = 0,960\,491\,P$
- b  $h = 0,640\,327\,P$
- c  $r = 0,137\,329\,P$

Figure 1 — Full-form thread profile and tolerance zones

Figure 2 shows fastening threads with truncated profiles and their tolerance zones.

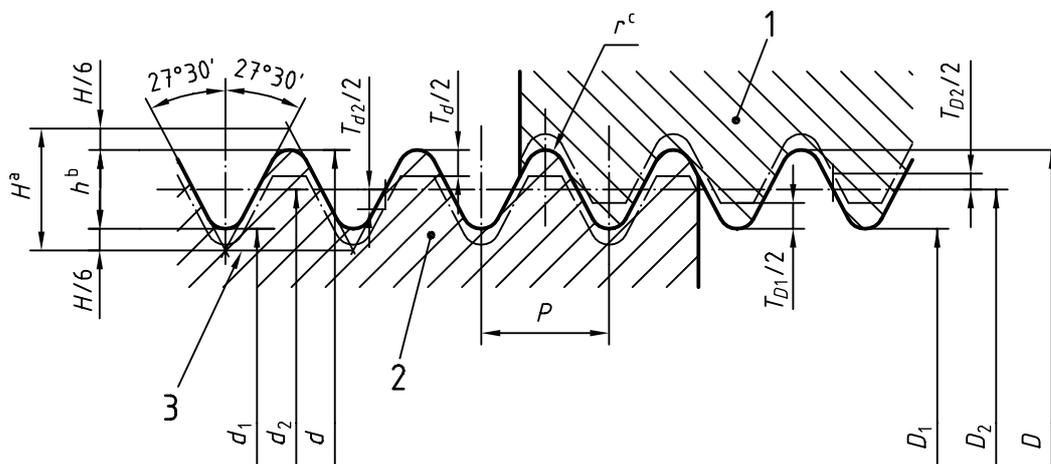

Key

- 1 Internal thread
- 2 External thread
- 3 Fundamental triangle

- a  $H = 0,960\,491\,P$
- b  $h = 0,640\,327\,P$
- c  $r = 0,137\,329\,P$

Figure 2 — Truncated-form thread profile and tolerance zones

Table 1 — Thread dimensions

Dimensions in millimetres

Designation of thread	Number of threads in 25,4 mm	Pitch $P$	Height of thread $h$	Diameters			Tolerances on pitch diameter <sup>a)</sup>						Tolerance on minor diameter		Tolerance on major diameter			
				major $d = D$	pitch $d_2 = D_2$	minor $d_1 = D_1$	Internal thread $T_{I,2}$		External thread $T_{E,2}$		Internal thread $T_{D,1}$		External thread $T_{E,1}$		Lower deviation	Upper deviation	Lower deviation	Upper deviation
							Lower deviation	Upper deviation	Lower deviation	Upper deviation	Lower deviation	Upper deviation	Lower deviation	Upper deviation				
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16			
1/16	28	0,907	0,581	7,723	7,142	6,561	0	+0,107	-0,107	-0,214	0	0	+0,282	-0,214	0			
1/8	28	0,907	0,581	9,728	9,147	8,566	0	+0,107	-0,107	-0,214	0	0	+0,282	-0,214	0			
1/4	19	1,337	0,856	13,157	12,301	11,445	0	+0,125	-0,125	-0,250	0	0	+0,445	-0,250	0			
3/8	19	1,337	0,856	16,662	15,806	14,950	0	+0,125	-0,125	-0,250	0	0	+0,445	-0,250	0			
1/2	14	1,814	1,162	20,955	19,793	18,631	0	+0,142	-0,142	-0,284	0	0	+0,541	-0,284	0			
5/8	14	1,814	1,162	22,911	21,749	20,587	0	+0,142	-0,142	-0,284	0	0	+0,541	-0,284	0			
3/4	14	1,814	1,162	26,441	25,279	24,117	0	+0,142	-0,142	-0,284	0	0	+0,541	-0,284	0			
7/8	14	1,814	1,162	30,201	29,039	27,877	0	+0,142	-0,142	-0,284	0	0	+0,541	-0,284	0			
1	11	2,309	1,479	33,249	31,770	30,291	0	+0,180	-0,180	-0,360	0	0	+0,640	-0,360	0			
1 1/8	11	2,309	1,479	37,897	36,418	34,939	0	+0,180	-0,180	-0,360	0	0	+0,640	-0,360	0			
1 1/4	11	2,309	1,479	41,910	40,431	38,952	0	+0,180	-0,180	-0,360	0	0	+0,640	-0,360	0			
1 1/2	11	2,309	1,479	47,803	46,324	44,845	0	+0,180	-0,180	-0,360	0	0	+0,640	-0,360	0			
1 3/4	11	2,309	1,479	53,746	52,267	50,788	0	+0,180	-0,180	-0,360	0	0	+0,640	-0,360	0			
2	11	2,309	1,479	59,614	58,135	56,656	0	+0,180	-0,180	-0,360	0	0	+0,640	-0,360	0			
2 1/4	11	2,309	1,479	65,710	64,231	62,752	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
2 1/2	11	2,309	1,479	75,184	73,705	72,226	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
2 3/4	11	2,309	1,479	81,534	80,055	78,576	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
3	11	2,309	1,479	87,884	86,405	84,926	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
3 1/2	11	2,309	1,479	100,330	98,851	97,372	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
4	11	2,309	1,479	113,030	111,551	110,072	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
4 1/2	11	2,309	1,479	125,730	124,251	122,772	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
5	11	2,309	1,479	138,430	136,951	135,472	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
5 1/2	11	2,309	1,479	151,130	149,651	148,172	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			
6	11	2,309	1,479	163,830	162,351	160,872	0	+0,217	-0,217	-0,434	0	0	+0,640	-0,434	0			

a) For thin-walled parts, the tolerances apply to the mean pitch diameter, which is the arithmetical mean of two diameters measured at right angles to each other.

**EN ISO 228-1:2003****5 Designation**

The designation of threads shall consist of the following elements in the given sequence.

## a) Description block:

Pipe thread

## b) International Standard number block:

ISO 228

## c) Individual item block (one of the following, as applicable):

- the letter G followed by the designation of the thread size from column 1 of Table 1 for internal threads (one class of tolerance only); or
- the letter G followed by the designation of the thread size from column 1 of Table 1 and the letter A for class A external threads; or
- the letter G followed by the designation of the thread size from column 1 of Table 1 and the letter B for class B external threads.

## d) For left-hand threads, the letters LH shall be added to the designation. Right-hand threads require no special designation.

EXAMPLES Complete designation for a right-hand thread size 1 1/2:

— Internal thread	(one tolerance class only)	<b>Pipe thread ISO 228 - G 1 1/2</b>
— External thread	{ tolerance class A tolerance class B	<b>Pipe thread ISO 228 - G 1 1/2 A</b>
		<b>Pipe thread ISO 228 - G 1 1/2 B</b>

**6 Combination with jointing thread**

Combining an external parallel thread G, tolerance class A or B, in accordance with ISO 228-1, with an internal parallel thread Rp, in accordance with ISO 7-1, needs special consideration.

When this combination is necessary, the tolerance of the internal thread in accordance with ISO 7-1 shall be considered in the relevant product standards, where external parallel threads G are used.

NOTE Such a combination of threads does not necessarily achieve a leaktight joint.

## Annex A (informative)

### References to European Standards

In clauses 2, 4 and 6 of this part of ISO 228 reference is made to ISO 7-1 for pipe threads where pressure-tight joints are made on the threads.

Since the European Standard for pipe threads where pressure-tight joints are made on the threads is numbered differently from ISO 7-1, and considering that EN ISO 228-1 is used by both ISO and CEN (the European Committee for Standardization), the following definitions have been introduced for reference purposes only.

- When EN ISO 228-1 is used as an International Standard, the referenced pipe thread where pressure-tight joints are made on the threads shall be in conformance with ISO 7-1.
- When EN ISO 228-1 is used as a European Standard, the referenced pipe thread where pressure-tight joints are made on the threads shall be in conformance with prEN 10226-1 or prEN 10226-2.

## Bibliography

- [1] ISO 228-2:1987, *Pipe threads where pressure-tight joints are not made on the threads — Part 2: Verification by means of limit gauges.*



**BS EN ISO  
228-1:2003**

---

---

# BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

## Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.  
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

## Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.  
Fax: +44 (0)20 8996 7001. Email: [orders@bsi-global.com](mailto:orders@bsi-global.com). Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

## Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.  
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: [info@bsi-global.com](mailto:info@bsi-global.com).

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.  
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.  
Email: [membership@bsi-global.com](mailto:membership@bsi-global.com).

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

## Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.  
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.  
Email: [copyright@bsi-global.com](mailto:copyright@bsi-global.com).

BSI  
389 Chiswick High Road  
London  
W4 4AL